

## Electrodeless Flood Light Series



### Features : NPT- DJ03

Protection Class: IP65

Impact resistant extrusion aluminium body


Static spraying surface treatment technology, and high temperature resistant and good weather resistant performance, durable

Imported mirror surface aluminium reflector, high reflectivity ensures the high output of luminous flux, high light transmission and impacting resistant

New type silicon rubber sealing ring ensure the aging resistant of silicon rubber



Electronic Ballast

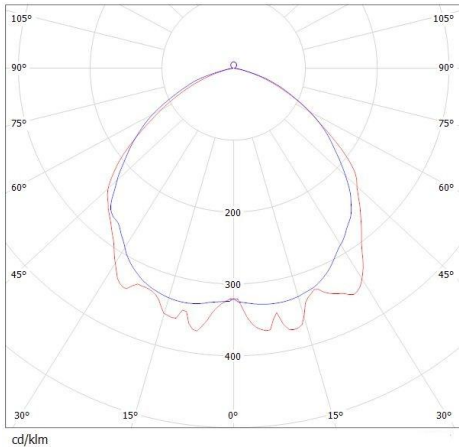

### Photometrics


### Technical details

#### Lamp Specifications

Lamp Wattage	Luminous Flux	Pupil Lumens	CRI	Colour Temp.	Lamp life span
150 W	12000	19440	80-85	5000 k	80,000 hrs
200 W	16000	25920			
250 W	20000	32400			
300 W	24000	38880			

#### Ballast Specifications

System Wattage	Input Voltage	Input Current (amps)	THD	Ambient temp.	Power factor
150 W	110 – 277 Vac	0.68	<10%	-25 to 50 deg C	>0.98
200 W		0.90			
250 W		1.14			
300 W		1.36			

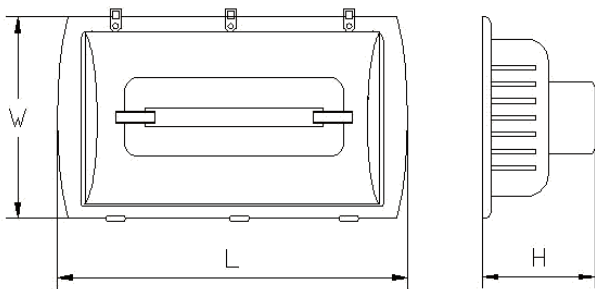

### Dimensions

Wattage	Dimensions
150W 200W 250W 300W	600 x 380 x 245
Estimated Weight : 5 KG	

